

KMG 系列

标准品

耐清洗

RoHS指令
适应品

~ 250V_{dc}

- 保证 105°C 1,000 ~ 2,000 小时。
- 请注意 350 ~ 450V_{dc} 不属于基板清洗类型。




◆ 规格表

项目	性能																						
工作温度范围	-55~+105°C (6.3~100V _{dc})				-40~+105°C (160~400V _{dc})				-25~+105°C (450V _{dc})														
额定电压范围	6.3~450V _{dc}																						
静电容量容许差	±20% (M) (20°C、120Hz)																						
漏电流	6.3~100V _{dc}																						
	I ≤ 0.03CV 或者 4 μA 中任意一个较大值																						
	160~450V _{dc}																						
	<table border="1"> <tr> <th>CV</th> <th>时间</th> <th>1分</th> <th>5分</th> </tr> <tr> <td>CV ≤ 1,000</td> <td></td> <td>I ≤ 0.1CV+40</td> <td>I ≤ 0.03CV+15</td> </tr> <tr> <td>CV > 1,000</td> <td></td> <td>I ≤ 0.04CV+100</td> <td>I ≤ 0.02CV+25</td> </tr> </table>												CV	时间	1分	5分	CV ≤ 1,000		I ≤ 0.1CV+40	I ≤ 0.03CV+15	CV > 1,000		I ≤ 0.04CV+100
CV	时间	1分	5分																				
CV ≤ 1,000		I ≤ 0.1CV+40	I ≤ 0.03CV+15																				
CV > 1,000		I ≤ 0.04CV+100	I ≤ 0.02CV+25																				
(20°C、1分)																							
(20°C)																							
损失角正切值 (tan δ)	I: 漏电流 (μA)、C: 静电容量 (μF)、额定电压 (V _{dc})																						
	额定电压 (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160~250V	350~400V	450V											
	tan δ (Max.)	0.34	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.24	0.24											
但是, 超过1,000 μF 的每增加1,000 μF 则 tan δ 设定增加0.02。 (20°C、120Hz)																							
温度特性 (阻抗比 Max右表值)	额定电压 (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160~250V	350~400V	450V											
	Z(-25°C) / Z(+20°C)	5	4	3	2	2	2	2	2	3	6	6											
	Z(-40°C) / Z(+20°C)	12	10	8	5	4	3	3	3	4	6	—											
(120Hz)																							
耐久性	在105°C环境中, 不超过额定电压的范围下叠加额定纹波电流, 连续加载电压1,000小时 (但, 160V _{dc} 以上且 φ 12.5以上的为2,000小时) 后, 待温度恢复到20°C进行测量时, 应满足以下要求。																						
	静电容量变化率	≤ 初始值的 ±20%																					
	损失角正切值	≤ 初始规格值的200%																					
	漏电流	≤ 初始规格值																					
高温无负荷特性	在105°C环境中, 无负荷放置1,000小时后待温度恢复到20°C, 进行试验前处理 (JIS C 5101-4 4.1项) 后进行测量时, 应满足以下要求。																						
	额定电压 (V _{dc})	6.3~100V _{dc}				160~450V _{dc}																	
	静电容量变化率	≤ 初始值的 ±20%				≤ 初始值的 ±20%																	
	损失角正切值	≤ 初始规格值的200%				≤ 初始规格值的200%																	
	漏电流	≤ 初始规格值				≤ 初始规格值的500%																	


◆ 尺寸图 (CE04形) [mm]

● 端子代码: E

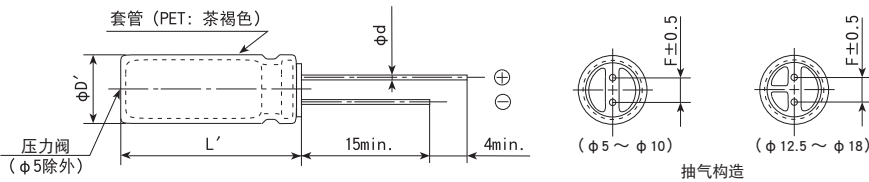

φ D	5	6.3	8	10	12.5	16	18
φ d	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φ D'	φ D + 0.5max.						
L'	L + 1.5max.						

◆ 产品型号体系

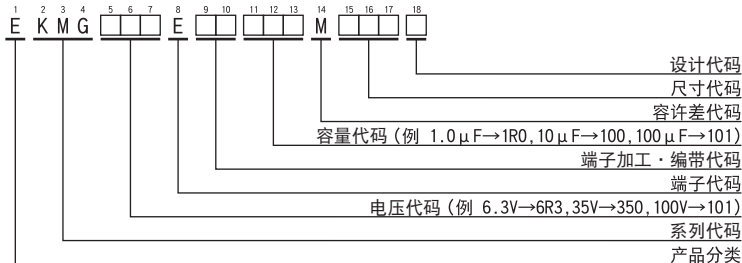

产品型号代码的详细介绍请参考「产品型号表示方法 (引线型)」。

◆标准品一览表

WV (Vdc)	Cap (μF)	尺寸 φD×L(mm)	tan δ	额定纹波电流 (mArms/105°C, 120Hz)	产品型号	WV (Vdc)	Cap (μF)	尺寸 φD×L(mm)	tan δ	额定纹波电流 (mArms/105°C, 120Hz)	产品型号	
6.3	220	5×11	0.34	140	EKMG6R3E□□221ME11D	63	10	5×11	0.10	46	EKMG630E□□100ME11D	
	330	6.3×11	0.34	190	EKMG6R3E□□331MF11D		22	5×11	0.10	71	EKMG630E□□220ME11D	
	470	6.3×11	0.34	230	EKMG6R3E□□471MF11D		33	6.3×11	0.10	100	EKMG630E□□330MF11D	
	1,000	8×11.5	0.34	380	EKMG6R3E□□102MHB5D		47	6.3×11	0.10	120	EKMG630E□□470MF11D	
	2,200	10×20	0.36	710	EKMG6R3E□□222MJ20S		100	10×12.5	0.10	215	EKMG630E□□101MJC5S	
	3,300	10×20	0.38	840	EKMG6R3E□□332MJ20S		220	10×16	0.10	335	EKMG630E□□221MJ16S	
	4,700	12.5×20	0.40	1,090	EKMG6R3E□□472MK20S		330	10×20	0.10	510	EKMG630E□□331MJ20S	
	6,800	12.5×25	0.44	1,350	EKMG6R3E□□682MK25S		470	12.5×20	0.10	640	EKMG630E□□471MK20S	
	10,000	16×25	0.52	1,650	EKMG6R3E□□103ML25S		1,000	16×25	0.10	930	EKMG630E□□102ML25S	
	15,000	16×35.5	0.62	2,010	EKMG6R3E□□153MLP1S		100	1.0	5×11	0.08	15	EKMG101E□□1R0ME11D
22,000	18×40	0.76	2,350	EKMG6R3E□□223MM40S	2.2	5×11		0.08	21	EKMG101E□□2R2ME11D		
10	220	6.3×11	0.24	170	EKMG100E□□221MF11D	3.3		5×11	0.08	29	EKMG101E□□3R3ME11D	
	330	6.3×11	0.24	200	EKMG100E□□331MF11D	4.7		5×11	0.08	32	EKMG101E□□4R7ME11D	
	470	8×11.5	0.24	250	EKMG100E□□471MHB5D	10		6.3×11	0.08	54	EKMG101E□□101MJ11D	
	1,000	10×12.5	0.24	460	EKMG100E□□102MJC5S	22		8×11.5	0.08	93	EKMG101E□□220MHB5D	
	2,200	10×20	0.26	760	EKMG100E□□222MJ20S	33		8×11.5	0.08	130	EKMG101E□□330MHB5D	
	3,300	12.5×20	0.28	1,000	EKMG100E□□332MK20S	47		10×12.5	0.08	165	EKMG101E□□470MJC5S	
	4,700	12.5×25	0.30	1,260	EKMG100E□□472MK25S	100		10×20	0.08	265	EKMG101E□□101MJ20S	
	6,800	16×25	0.34	1,570	EKMG100E□□682ML25S	220		12.5×25	0.08	440	EKMG101E□□221MK25S	
	10,000	16×35.5	0.42	1,890	EKMG100E□□103MLP1S	330	16×25	0.08	540	EKMG101E□□331ML25S		
	15,000	18×35.5	0.52	2,180	EKMG100E□□153MMP1S	470	16×31.5	0.08	715	EKMG101E□□471MLN3S		
16	100	5×11	0.20	110	EKMG160E□□101ME11D	1,000	18×40	0.08	985	EKMG101E□□102MM40S		
	220	6.3×11	0.20	180	EKMG160E□□221MF11D	160	3.3	6.3×11	0.20	28	EKMG161E□□3R3MF11D	
	330	8×11.5	0.20	260	EKMG160E□□331MHB5D		4.7	6.3×11	0.20	34	EKMG161E□□4R7MF11D	
	470	8×11.5	0.20	310	EKMG160E□□471MHB5D		10	10×12.5	0.20	67	EKMG161E□□100MJC5S	
	1,000	10×16	0.20	560	EKMG160E□□102MJ16S		22	10×20	0.20	120	EKMG161E□□220MJ20S	
	2,200	12.5×20	0.22	920	EKMG160E□□222MK20S		33	10×20	0.20	145	EKMG161E□□330MJ20S	
	3,300	12.5×25	0.24	1,170	EKMG160E□□332MK25S		47	12.5×20	0.20	195	EKMG161E□□470MK20S	
	4,700	16×25	0.26	1,480	EKMG160E□□472ML25S		100	16×25	0.20	335	EKMG161E□□101ML25S	
	6,800	16×31.5	0.30	1,780	EKMG160E□□682MLN3S		220	16×31.5	0.20	540	EKMG161E□□221MLN3S	
	10,000	18×35.5	0.38	2,060	EKMG160E□□103MMP1S		330	18×35.5	0.20	705	EKMG161E□□331MMP1S	
25	47	5×11	0.16	80	EKMG250E□□470ME11D		200	3.3	6.3×11	0.20	28	EKMG201E□□3R3MF11D
	100	6.3×11	0.16	130	EKMG250E□□101MF11D	4.7		8×11.5	0.20	39	EKMG201E□□4R7MHB5D	
	220	8×11.5	0.16	230	EKMG250E□□221MHB5D	10		10×16	0.20	74	EKMG201E□□100MJ16S	
	330	8×11.5	0.16	310	EKMG250E□□331MHB5D	22		10×20	0.20	120	EKMG201E□□220MJ20S	
	470	10×12.5	0.16	380	EKMG250E□□471MJC5S	33		12.5×20	0.20	160	EKMG201E□□330MK20S	
	1,000	10×20	0.16	680	EKMG250E□□102MJ20S	47		12.5×20	0.20	195	EKMG201E□□470MK20S	
	2,200	12.5×25	0.18	1,090	EKMG250E□□222MK25S	100		16×25	0.20	335	EKMG201E□□101ML25S	
	3,300	16×25	0.20	1,400	EKMG250E□□332ML25S	220		18×35.5	0.20	575	EKMG201E□□221MMP1S	
	4,700	16×31.5	0.22	1,710	EKMG250E□□472MLN3S	250		2.2	6.3×11	0.20	23	EKMG251E□□2R2MF11D
	6,800	18×35.5	0.26	2,040	EKMG250E□□682MMP1S			3.3	8×11.5	0.20	32	EKMG251E□□3R3MHB5D
35	47	5×11	0.14	90	EKMG350E□□470ME11D		4.7	8×11.5	0.20	39	EKMG251E□□4R7MHB5D	
	100	6.3×11	0.14	150	EKMG350E□□101MF11D		10	10×16	0.20	74	EKMG251E□□100MJ16S	
	220	8×11.5	0.14	270	EKMG350E□□221MHB5D		22	12.5×20	0.20	130	EKMG251E□□220MK20S	
	330	10×12.5	0.14	350	EKMG350E□□331MJC5S		33	12.5×20	0.20	160	EKMG251E□□330MK20S	
	470	10×16	0.14	460	EKMG350E□□471MJ16S		47	12.5×25	0.20	210	EKMG251E□□470MK25S	
	1,000	12.5×20	0.14	810	EKMG350E□□102MK20S		100	16×31.5	0.20	365	EKMG251E□□101MLN3S	
	2,200	16×25	0.16	1,260	EKMG350E□□222ML25S		220	18×40	0.20	585	EKMG251E□□221MM40S	
	3,300	16×35.5	0.18	1,610	EKMG350E□□332MLP1S		350	1.0	6.3×11	0.24	15	EKMG351E□□1R0MF11D
	4,700	18×35.5	0.20	1,910	EKMG350E□□472MMP1S	2.2		8×11.5	0.24	26	EKMG351E□□2R2MHB5D	
	50	1.0	5×11	0.12	13	EKMG500E□□1R0ME11D		3.3	10×12.5	0.24	38	EKMG351E□□3R3MJC5S
2.2		5×11	0.12	20	EKMG500E□□2R2ME11D	4.7		10×16	0.24	50	EKMG351E□□4R7MJ16S	
3.3		5×11	0.12	25	EKMG500E□□3R3ME11D	10		10×20	0.24	80	EKMG351E□□100MJ20S	
4.7		5×11	0.12	30	EKMG500E□□4R7ME11D	22		12.5×20	0.24	130	EKMG351E□□220MK20S	
10		5×11	0.12	40	EKMG500E□□100ME11D	33		16×25	0.24	195	EKMG351E□□330ML25S	
22		5×11	0.12	65	EKMG500E□□220ME11D	47		16×25	0.24	230	EKMG351E□□470ML25S	
33		5×11	0.12	90	EKMG500E□□330ME11D	100		18×31.5	0.24	375	EKMG351E□□101MMN3S	
47		6.3×11	0.12	110	EKMG500E□□470MF11D	400		1.0	6.3×11	0.24	15	EKMG401E□□1R0MF11D
100		8×11.5	0.12	180	EKMG500E□□101MHB5D		2.2	8×11.5	0.24	26	EKMG401E□□2R2MHB5D	
220		10×12.5	0.12	300	EKMG500E□□221MJC5S		3.3	10×12.5	0.24	38	EKMG401E□□3R3MJC5S	
330	10×16	0.12	410	EKMG500E□□331MJ16S	4.7		10×16	0.24	50	EKMG401E□□4R7MJ16S		
470	10×20	0.12	530	EKMG500E□□471MJ20S	10		10×20	0.24	80	EKMG401E□□100MJ20S		
1,000	12.5×25	0.12	950	EKMG500E□□102MK25S	22		12.5×25	0.24	145	EKMG401E□□220ML25S		
2,200	16×35.5	0.14	1,470	EKMG500E□□222MLP1S	33		16×25	0.24	195	EKMG401E□□330ML25S		
3,300	18×35.5	0.16	1,770	EKMG500E□□332MMP1S	47		16×31.5	0.24	250	EKMG401E□□470MLN3S		
							100	16×40	0.24	350	EKMG401E□□101ML40S	

□□内为端子加工·编带代码。

KMG系列

◆标准品一览表

□ 内的产品 (350~450V_{dc}) 不能进行基板清洗。

WV (V _{dc})	Cap (μ F)	尺寸 ϕ D×L(mm)	$\tan \delta$	额定纹波 电流 (mA _{rms} / 105°C, 120Hz)	产品型号
450	2.2	10×12.5	0.24	23	EKMG45 1E□□2R2MJC5S
	3.3	10×16	0.24	31	EKMG45 1E□□3R3MJ16S
	4.7	10×20	0.24	40	EKMG45 1E□□4R7MJ20S
	10	12.5×20	0.24	65	EKMG45 1E□□100MK20S
	22	16×25	0.24	115	EKMG45 1E□□220ML25S
	33	16×31.5	0.24	155	EKMG45 1E□□330MLN3S
	47	16×35.5	0.24	185	EKMG45 1E□□470MLP1S

□□内为端子加工·编带代码。

◆额定纹波电流频率修正系数

纹波频率与标准品一览表的规定值相异时, 请使用小于乘以下表系数所得之值的值。

●频率修正系数

静电容量 (μ F)	频率 (Hz)					
	50	120	300	1k	10k	100k
1.0~4.7	0.65	1.00	1.35	1.75	2.30	2.50
10~47	0.75	1.00	1.25	1.50	1.75	1.80
100~1,000	0.80	1.00	1.15	1.30	1.40	1.50
2,200~	0.85	1.00	1.03	1.05	1.08	1.08

※ 铝电解电容器由于在纹波电流叠加时自我发热、温度上升而老化, 每升温 5°C 寿命减少一半。
要想保持长寿命请在使用过程中降低纹波电流。